




LED

GS-IU54G007

REMOTE CONTROLLED INTELLIGENT MOTION & DAYLIGHT MIXING SENSOR

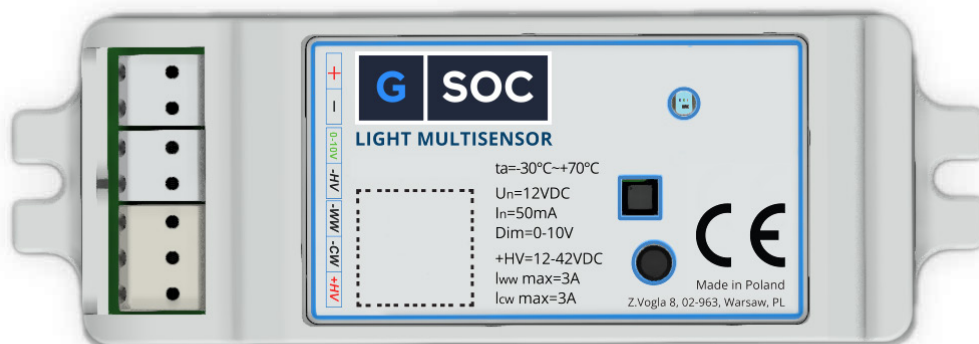


GSoc LED INTELLIGENT SENSOR 5GHz

Compatible, luminaire controller

Plug-and-play upgrade for lamps compatible with full lamp management and feedback functionality.

Intelligent light sensor with dimming function with a built-in sensor for mixing natural and artificial light. Thanks to the unique solution of the ALS RGB and IR double light sensor, it can distinguish sunlight from artificial light, and the implemented algorithms allow for precise selection of the set light value. The sensor is equipped with a 5.8GHz radar. In addition to the precise motion detection function, it has a presence function. Advanced calibration and the ability to set sensitivity parameters for the motion detection and presence functions make the solution unique and very precise regardless of the working environment. The sensor is equipped with the latest generation processor with a communication layer in BLE technology and an algorithmic layer, where the manufacturer placed AI algorithms trained on neural networks.

Based on many years of experience gathered from installers, the manufacturer has equipped the mobile application or remote control with functions that enable easy installation of the luminaire and large energy savings for end customers.

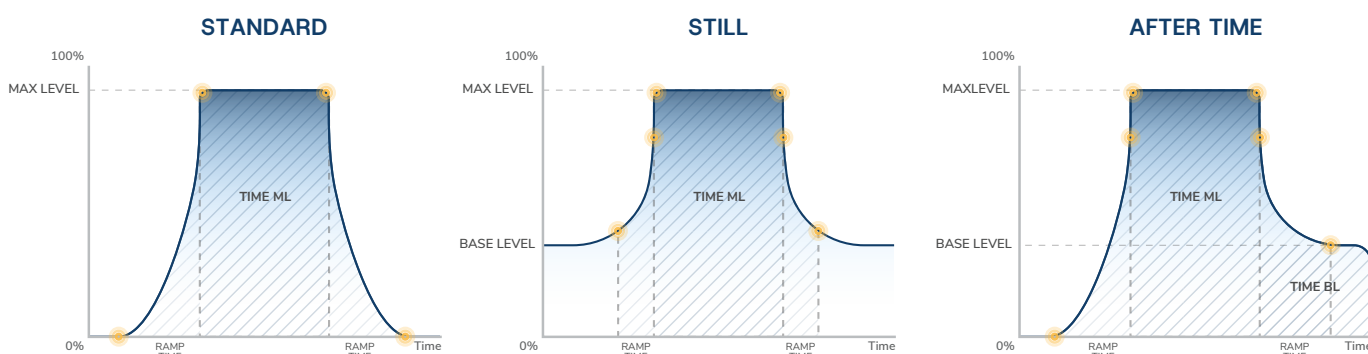

GSoc Sp. z o.o.
Ul. Z. Vogla 8, 02-963
Warszawa, Polska

E-mail: office@gsoc.pl
www.gsoc.pl


SENSOR TECHNICAL PARAMETERS

Lamp Type	any with driver 12V AUX DIM 0-10
Maximum lamp power	Depending on the lamp driver
Functions / Operation mode	on/off dimming, motion detection, static detection CCT(dali only), addjustment light harvesting
Dimming range	0%-100% (linear)
White Tunable (CCT suport)	-
Motion Range	0-10m
Static Range	not
Control interface	0-10V
Power supply	12VDC
External interface	BT
Supported frequencies	worldwide
Inter-node mesh communication	BLE Mesh
Firmware update	BLE
Security	SHA256 (BLE only), AES256 (BLE Mesh)
Average power consumption	0,5W/12V
Maximum power consumption	1W/12V
Real-time lamp operation	YES
Output	0-10V/CCT
Light sensor	Integrated. ALS RGB,CCT, IR
Ingress protection	IP20
Operating temperature range	-30°C to +55°C
Mounting	Inside lamp

LUMINAIRES CONTROL




MOBILE APP

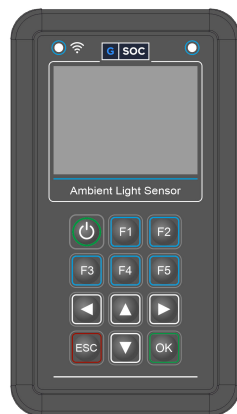

Remote Controller

DIMENSIONS

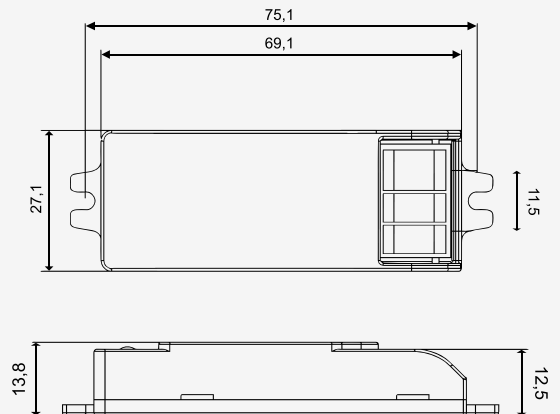

SENSOR TYPE

	GS-IU54G007	GS-IU54GCC7	GS-IU24G007	GS-IU24GCC7	GS-IU54G007-D4	GS-IU24G007-D4
Base	flat	flat	flat	flat	flat	flat
Control	0-10	0-10	0-10	0-10	D4I	D4I
Radar	5.8 GHz	5.8 GHz	24GHz GHz	24 GHz	5.8 GHz	24 GHz
GSM	-	-	-	-	-	-
LoRa	-	-	-	-	-	-
CCT	-	CCT	-	CCT	CCT	CCT